

10/519373

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/006400 A1

(51) International Patent Classification⁷: H02G 3/06

(21) International Application Number:
PCT/GB2003/001715

(22) International Filing Date: 22 April 2003 (22.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0215368.2 3 July 2002 (03.07.2002) GB

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: THOMPSON, Richard, John [GB/GB]; 7
Holywood, Woosingham, Co Durham DI13 3HE (GB).


Published:

— with international search report

(74) Agent: VINSOME, Rex, Martin; Urquhart-Dykes &
Lord, St Nicholas Chambers, Amen Corner, Newcastle
upon Tyne NE1 1PE (GB).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TRUNKING AND COUPLING MEANS THEREFOR

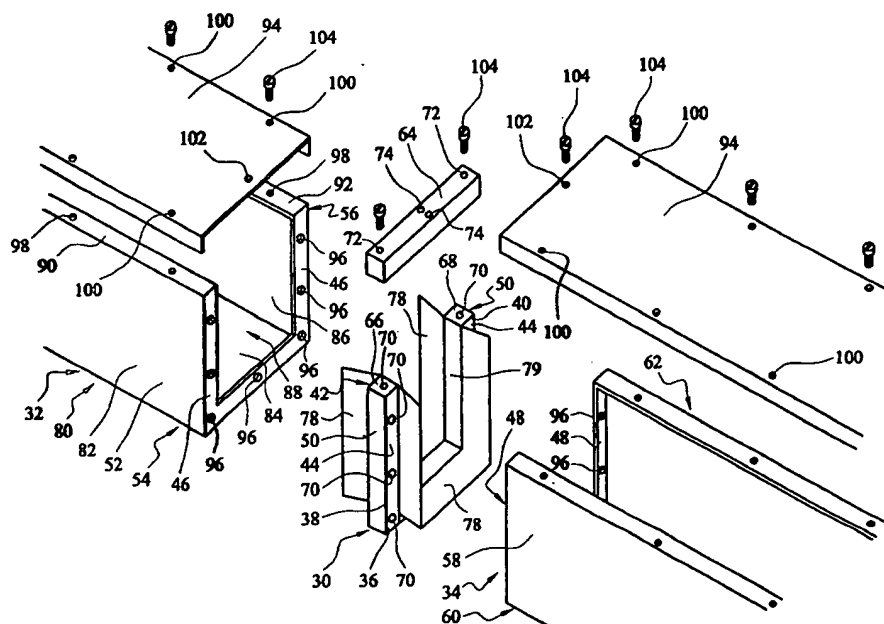

(57) Abstract: A coupling (30) for coupling a first section of trunking (32) to a second section of trunking (34), has a body (36). The body (36) has first and second elongate members (38) and (40), and defines first surface (42) and second surface (44). The first surface (42) is adapted to engage a first flange (46) on first trunking section (32) and the second surface (44) is adapted to engage a second flange (48) on second trunking section (34). A third surface (50) of body (36) connects the first and second surfaces (42) and (44) and provides a substantially continuous surface with external surfaces (52, 54) and (56) of first trunking section (32) and external surfaces (58, 60) and (62) of second trunking section (34).

WO 2004/006400 A1